

OXFORD CAMBRIDGE AND RSA EXAMINATIONS

Advanced Subsidiary General Certificate of Education
Advanced General Certificate of Education

MEI STRUCTURED MATHEMATICS

4763

Mechanics 3

Tuesday 10 JANUARY 2006 Afternoon 1 hour 30 minutes

Additional materials:
8 page answer booklet
Graph paper
MEI Examination Formulae and Tables (MF2)

TIME 1 hour 30 minutes

INSTRUCTIONS TO CANDIDATES

- Write your name, centre number and candidate number in the spaces provided on the answer booklet.
- Answer **all** the questions.
- You are permitted to use a graphical calculator in this paper.
- Final answers should be given to a degree of accuracy appropriate to the context.
- The acceleration due to gravity is denoted by $g \text{ m s}^{-2}$. Unless otherwise instructed, when a numerical value is needed, use $g = 9.8$.

INFORMATION FOR CANDIDATES

- The number of marks is given in brackets [] at the end of each question or part question.
- You are advised that an answer may receive **no marks** unless you show sufficient detail of the working to indicate that a correct method is being used.
- The total number of marks for this paper is 72.

This question paper consists of 4 printed pages.

- 1 (a) (i) Write down the dimensions of force. [1]

The period, t , of a vibrating wire depends on its tension, F , its length, l , and its mass per unit length, σ .

- (ii) Assuming that the relationship is of the form $t = kF^\alpha l^\beta \sigma^\gamma$, where k is a dimensionless constant, use dimensional analysis to determine the values of α , β and γ . [6]

Two lengths are cut from a reel of uniform wire. The first has length 1.2 m, and it vibrates under a tension of 90 N. The second has length 2.0 m, and it vibrates with the same period as the first wire.

- (iii) Find the tension in the second wire. (You may assume that changing the tension does not significantly change the mass per unit length.) [4]

- (b) The midpoint M of a vibrating wire is moving in simple harmonic motion in a straight line, with amplitude 0.018 m and period 0.01 s.

- (i) Find the maximum speed of M. [3]

- (ii) Find the distance of M from the centre of the motion when its speed is 8 m s^{-1} . [4]

- 2 (a) A moon of mass 7.5×10^{22} kg moves round a planet in a circular path of radius 3.8×10^8 m, completing one orbit in a time of 2.4×10^6 s. Find the force acting on the moon. [4]
- (b) Fig. 2 shows a fixed solid sphere with centre O and radius 4 m. Its surface is smooth. The point A on the surface of the sphere is 3.5 m vertically above the level of O. A particle P of mass 0.2 kg is placed on the surface at A and is released from rest. In the subsequent motion, when OP makes an angle θ with the horizontal and P is still on the surface of the sphere, the speed of P is $v \text{ ms}^{-1}$ and the normal reaction acting on P is $R \text{ N}$.

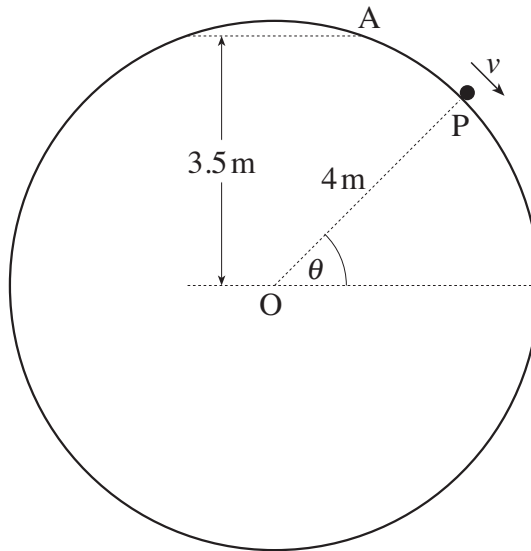


Fig. 2

- (i) Express v^2 in terms of θ . [3]
- (ii) Show that $R = 5.88 \sin \theta - 3.43$. [4]
- (iii) Find the radial and tangential components of the acceleration of P when $\theta = 40^\circ$. [4]
- (iv) Find the value of θ at the instant when P leaves the surface of the sphere. [3]

- 3 A light elastic rope has natural length 15 m. One end of the rope is attached to a fixed point O and the other end is attached to a small rock of mass 12 kg.

When the rock is hanging in equilibrium vertically below O, the length of the rope is 15.8 m.

- (i) Show that the modulus of elasticity of the rope is 2205 N. [2]

The rock is pulled down to the point 20 m vertically below O, and is released from rest in this position. It moves upwards, and comes to rest instantaneously, with the rope slack, at the point A.

- (ii) Find the acceleration of the rock immediately after it is released. [3]

- (iii) Use an energy method to find the distance OA. [5]

At time t seconds after release, the rope is still taut and the displacement of the rock *below the equilibrium position* is x metres.

- (iv) Show that $\frac{d^2x}{dt^2} = -12.25x$. [4]

- (v) Write down an expression for x in terms of t , and hence find the time between releasing the rock and the rope becoming slack. [4]

- 4 The region between the curve $y = 4 - x^2$ and the x -axis, from $x = 0$ to $x = 2$, is occupied by a uniform lamina. The units of the axes are metres.

- (i) Show that the coordinates of the centre of mass of this lamina are (0.75, 1.6). [9]

This lamina and another exactly like it are attached to a uniform rod PQ, of mass 12 kg and length 8 m, to form a rigid body as shown in Fig. 4. Each lamina has mass 6.5 kg. The ends of the rod are at P(−4, 0) and Q(4, 0). The rigid body lies entirely in the (x, y) plane.

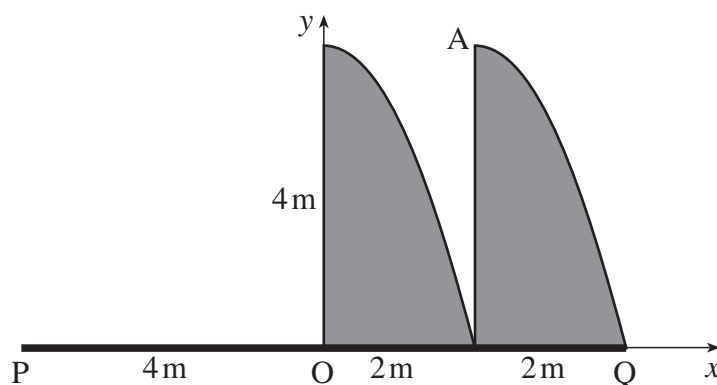


Fig. 4

- (ii) Find the coordinates of the centre of mass of the rigid body. [5]

The rigid body is freely suspended from the point A(2, 4) and hangs in equilibrium.

- (iii) Find the angle that PQ makes with the horizontal. [4]

Mark Scheme

1(a)(i)	MLT^{-2}	B1 1	Allow $kg\,ms^{-2}$
(ii)	$(T) = (MLT^{-2})^{\alpha} (L)^{\beta} (ML^{-1})^{\gamma}$ Powers of M: $\alpha + \gamma = 0$ of L: $\alpha + \beta - \gamma = 0$ of T: $-2\alpha = 1$ $\alpha = -\frac{1}{2}, \beta = 1, \gamma = \frac{1}{2}$	B1 M1 M2 A2 6	For ML^{-1} For three equations Give M1 for one equation Give A1 for one correct
(iii)	$kF_1^{\alpha} l_1^{\beta} \sigma^{\gamma} = kF_2^{\alpha} l_2^{\beta} \sigma^{\gamma}$ $F_1^{-\frac{1}{2}} l_1 = F_2^{-\frac{1}{2}} l_2$ <hr/> OR $F^{\alpha} l^{\beta}$ is constant F is proportional to l^2 <hr/> $F_2 = 90 \times \frac{2.0^2}{1.2^2}$ $= 250 \text{ (N)}$	M1 A1 M1 A1 M1 A1 4	Equation relating F_1, F_2, l_1, l_2 or equivalent
(b)(i)	$\frac{2\pi}{\omega} = 0.01$ $\omega = 200\pi$ Maximum speed is $A\omega = 0.018 \times 200\pi$ $= 11.3 \text{ (ms}^{-1}\text{)}$	B1 M1 A1 3	Accept 3.6π
(ii)	Using $v^2 = \omega^2(A^2 - x^2)$ $8^2 = (200\pi)^2(0.018^2 - x^2)$ $x = 0.0127 \text{ (m)}$ <hr/> OR $v = 3.6\pi \cos(200\pi t) = 8$ when $200\pi t = 0.785$ $(t = 0.001249)$ $x = 0.018 \sin(200\pi t) = 0.018 \sin(0.785)$ $= 0.0127$	M1 M1 A1 A1 4 M1 A1	Substituting values <i>Condone the use of degrees in this part</i>

2 (a)	$\omega = \frac{2\pi}{2.4 \times 10^6} \quad (= 2.618 \times 10^{-6})$ <p>Acceleration $a = r\omega^2$ (or $\frac{v^2}{r}$)</p> $= 2.604 \times 10^{-3}$ <p>Force is $ma = 7.5 \times 10^{22} \times 2.604 \times 10^{-3}$</p> $= 1.95 \times 10^{20} \text{ (N)}$	B1 M1 M1 A1 4	<p>or $v = \frac{2\pi \times 3.8 \times 10^8}{2.4 \times 10^6} \quad (= 994.8)$</p> <p>M0 for $F - mg = ma$ etc</p> <p>Accept 1.9×10^{20} or 2.0×10^{20}</p>
(b)(i)	<p>Change in PE is $mg(3.5 - 4 \sin \theta)$</p> <p>By conservation of energy</p> $\frac{1}{2}mv^2 = mg(3.5 - 4 \sin \theta)$ $v^2 = 68.6 - 78.4 \sin \theta$	B1 M1 A1 3	<p>or as separate terms</p> <p>Accept $7g - 8g \sin \theta$</p>
(ii)	$0.2 \times 9.8 \sin \theta - R = 0.2 \times \frac{v^2}{4}$ $1.96 \sin \theta - R = 0.05(68.6 - 78.4 \sin \theta)$ $R = 5.88 \sin \theta - 3.43$	M1 M1 A1 E1 4	<p>Radial equation of motion (3 terms)</p> <p>Substituting from part (i)</p> <p>Correctly obtained</p>
(iii)	<p>When $\theta = 40^\circ$, $v^2 = 18.21$</p> <p>Radial acceleration is $\frac{v^2}{4} = 4.55 \text{ (ms}^{-2}\text{)}$</p> <p>Tangential acceleration is $9.8 \cos 40$</p> $= 7.51 \text{ (ms}^{-2}\text{)}$	M1 A1 M1 A1 4	<p>or $0.2g \sin 40 - R = ma$</p> <p>Accept 4.5 or 4.6</p> <p>M0 for $a = mg \cos 40$ etc</p>
(iv)	<p>Leaves surface when $R = 0$</p> $\sin \theta = \frac{3.43}{5.88}$ $\theta = 35.7^\circ$	M1 M1 A1 cao 3	<p>Accept 36°, 0.62 rad</p>

3 (i)	$\frac{\lambda}{15} \times 0.8 = 12 \times 9.8$ $\lambda = 2205 \text{ (N)}$	M1 E1 2	
(ii)	$\frac{2205}{15} \times 5 - 12 \times 9.8 = 12a$ $a = 51.45 \text{ (ms}^{-2}\text{)}$	M1 A1 A1 3	Equation of motion including tension Accept 51 or 52
(iii)	Loss of EE is $\frac{1}{2} \times \frac{2205}{15} \times 5^2$ (=1837.5)	M1 A1	Calculating elastic energy
	By conservation of energy $12 \times 9.8 \times h = 1837.5$ $h = 15.625$ $OA = 20 - h = 4.375 \text{ (m)}$	M1 F1 A1 5	Equation involving EE and PE
	OR $12 \times 9.8 \times 5 + \frac{1}{2} \times 12 \times v^2 = 1837.5$ $v^2 = 208.25$ $0 = 208.25 - 2 \times 9.8 \times H$ $H = 10.625$ $OA = 15 - H = 4.375 \text{ (m)}$	M1 F1 A1	Equation involving EE, PE and KE
(iv)	$T = \frac{2205}{15}(0.8 + x)$ $12 \times 9.8 - \frac{2205}{15}(0.8 + x) = 12 \frac{d^2x}{dt^2}$ $\frac{d^2x}{dt^2} = -12.25x$	B1 M1 A1 E1 4	or $T = \frac{\lambda}{l}(x_0 + x)$ Equation of motion with three terms or $mg - \frac{\lambda}{l}(x_0 + x) = m \frac{d^2x}{dt^2}$ provided that $mg = \frac{\lambda}{l}x_0$ appears somewhere Correctly obtained <i>No marks for just writing</i> $-\frac{2205}{15}x = 12 \frac{d^2x}{dt^2}$ or just using <i>the formula</i> $\omega^2 = \frac{\lambda}{ml}$ <i>If x is clearly measured upwards, treat as a mis-read</i>
(v)	$x = 4.2 \cos(3.5t)$ Rope becomes slack when $x = -0.8$ $4.2 \cos(3.5t) = -0.8$ $t = 0.504 \text{ (s)}$	M1 A1 M1 A1 4	For $\cos(\sqrt{12.25}t)$ or $\sin(\sqrt{12.25}t)$ Accept 0.50 or 0.51

4 (i)	$\int y \, dx = \int_0^2 (4 - x^2) \, dx = \left[4x - \frac{1}{3}x^3 \right]_0^2 \quad (= \frac{16}{3})$	B1	
	$\int xy \, dx = \int_0^2 x(4 - x^2) \, dx$ $= \left[2x^2 - \frac{1}{4}x^4 \right]_0^2 \quad (= 4)$	M1	
	$\bar{x} = \frac{4}{\frac{16}{3}}$ $= 0.75$	A1	
		M1	
		E1	Correctly obtained
	$\int \frac{1}{2} y^2 \, dx = \int_0^2 \frac{1}{2} (16 - 8x^2 + x^4) \, dx$ $= \left[8x - \frac{4}{3}x^3 + \frac{1}{10}x^5 \right]_0^2 \quad (= \frac{128}{15})$	M1	
		A1	
	OR $\int yx \, dy = \int_0^4 y\sqrt{4-y} \, dy$	M1	Valid method of integration
	$= \left[-\frac{2}{3}y(4-y)^{\frac{3}{2}} - \frac{4}{15}(4-y)^{\frac{5}{2}} \right]_0^4$	A1	or $\left[-\frac{8}{3}(4-y)^{\frac{3}{2}} + \frac{2}{5}(4-y)^{\frac{5}{2}} \right]_0^4$
	$\bar{y} = \frac{\frac{128}{15}}{\frac{16}{3}}$ $= 1.6$	M1	
		E1	Correctly obtained
			9 SR If $\frac{1}{2}$ is omitted, marks for \bar{y} are M1A0M0E0
(ii)	$\bar{x} = \frac{12 \times 0 + 6.5 \times 0.75 + 6.5 \times 2.75}{12 + 6.5 + 6.5}$ $= \frac{22.75}{25} = 0.91$	M1	For $6.5 \times 0.75 + 6.5 \times 2.75$
		M1	Using $(\sum m)\bar{x} = \sum mx$
		A1	
	$\bar{y} = \frac{12 \times 0 + 6.5 \times 1.6 + 6.5 \times 1.6}{25}$ $= \frac{20.8}{25} = 0.832$	M1	Using $(\sum m)\bar{y} = \sum my$
		A1	
(iii)			5
	$\tan \theta = \frac{2 - 0.91}{4 - 0.832} \quad (= \frac{1.09}{3.168})$	M1	For CM vertically below A
		M1	For trig in a triangle containing θ , or finding the gradient of AG
		A1	Correct expression for $\tan \theta$ or $\tan(90 - \theta)$
	$\theta = 19.0^\circ$	A1	Accept 0.33 rad
			4